

# SPECIFICATIONS


(RoHS Compliant)



**Model Number:** MR2B3  
**Part Number:** 19028245A  
**SPEC Number:** 26013777A01

Jan 24, 2013

## Mechanical Drawing:

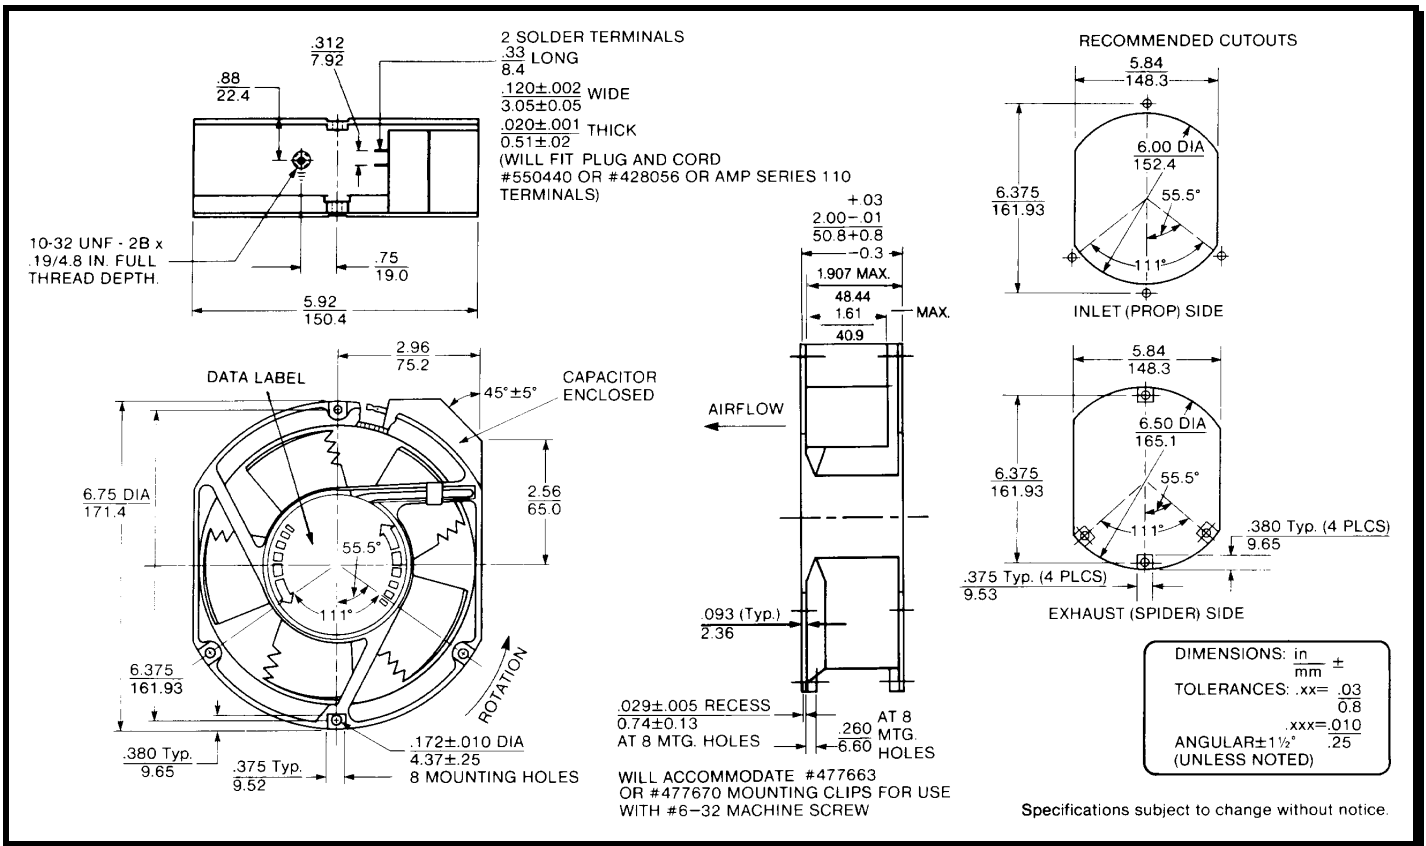

### Motor:

Nominal Voltage = 115 VAC  
 Frequency = 50 / 60 Hz  
 Nominal Running Current = 0.27 / 0.26 amps  
 Max. Locked Rotor Current = 0.48 / 0.47 amps  
 Running Power = 30 / 31 watts  
 Average Speed = 2850 / 3400 RPM  
 Bearings = Ball  
 Air Flow = 200 / 235 CFM  
 Acoustic = 52.2 / 55.8 dBA

### Construction:

Venturi: Single Piece Die Cast Aluminum, Black.  
 Propeller: Plastic, Black, UL 94V-0

### Life Expectancy:

This fan is designed for continuous duty life of 51,000 hours at 40°C.

### Additional Features:

Permanent Split Capacitor Motor  
 Thermal Protection  
 Automatic Restart  
 Impedance protected  
 Operating Temperature: -10°C to 70°C  
 Storage Temperature: -40°C to 85°C

### Agency Approvals:

UL, CE

### Additional Features:

0.110" Terminals